

RG6 Compression F Connector

CPX-RG6-CF

Secure, weather-resistant RG6 coaxial cable terminations for broadband, CATV and HFC installations.



One-piece compression design

Combines the connector body and compression sleeve in one assembly.

Shield continuity

Metallic construction supports continuity of the coaxial cable shield.

Indoor and outdoor use

Weather-resistant sealing supports cable terminations across installation environments.

KEY SPECIFICATIONS

Specification	Details
Cable family	RG6 coaxial cable
Connector interface	F connector
Termination method	Compression
Construction	Metallic body with compression sleeve
Sealing	Weather-resistant sealing element
Installation tool	Compatible compression tool matched to the connector
Applications	Broadband, CATV, HFC and satellite coaxial systems
Overall length	29.3 mm; dimensional tolerance shown on drawing
Maximum outside diameter	11.2 mm


SELECT FOR THE CABLE

Specify the cable construction and dimensions so the connector and compression tool can be matched to the installation.

RG6 Compression F Connector

CPX-RG6-CF

Dimensional reference for cable termination and installation planning.

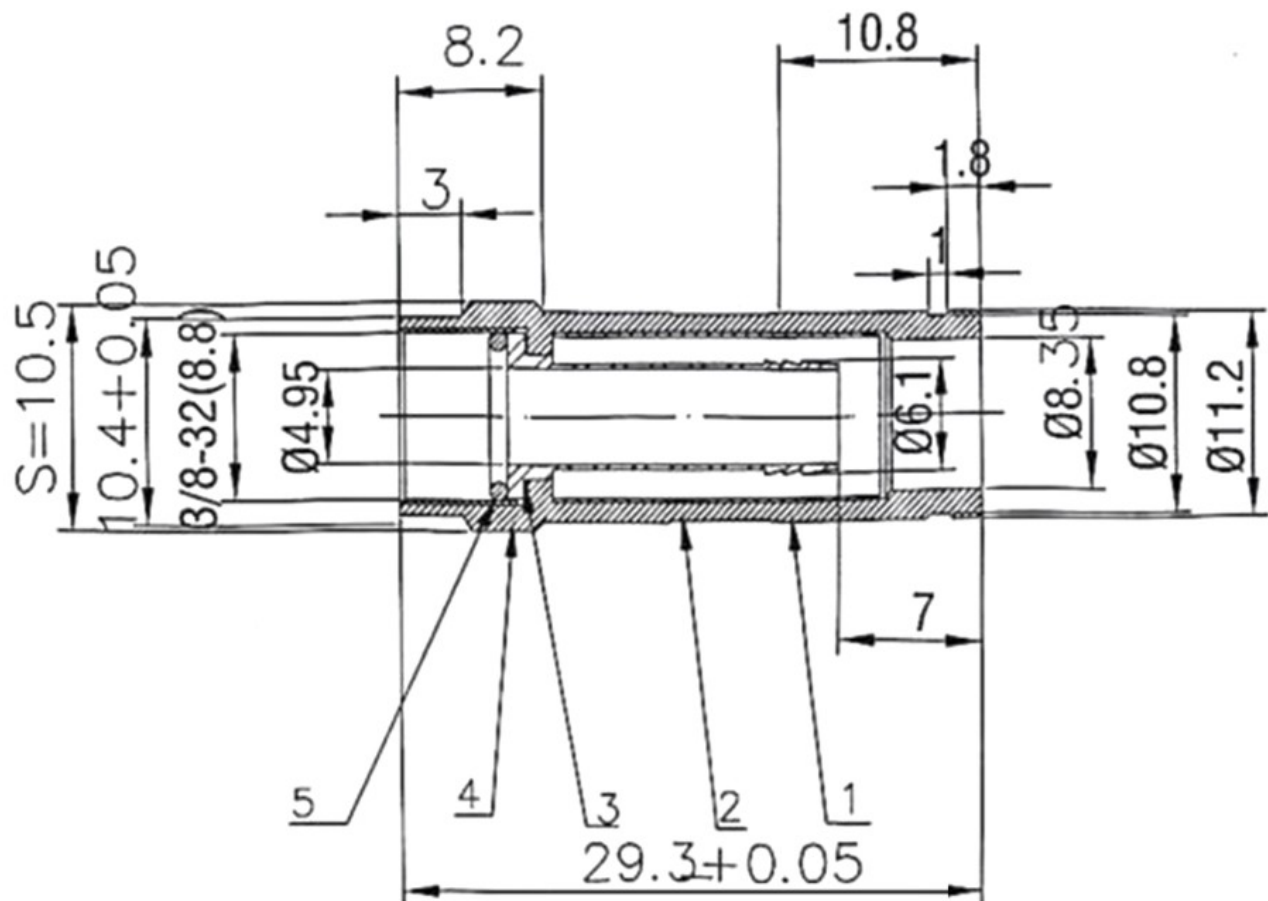

Dimensions in millimeters. Confirm the cable construction and compression tool for the intended installation.