


FIBER & ACCESS / FIBER MANAGEMENT

Fiber Interface & Slack Storage Enclosure

CX-31 Series

Bring fiber termination, splice protection and slack storage together at the transition between outside-plant cable and customer premises.

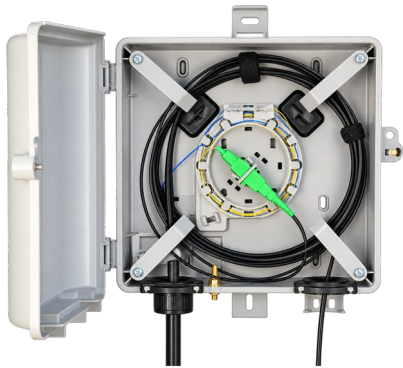

Open enclosure with fiber routing and adapter plate.

Keep fiber organized

Corner slack retention and multiple tie-down points help manage stored cable.

Configure the interface

Select SC or LC adapters, port count and the required cable-entry options.

Control enclosure access

A 3/8-inch hex-bolt cover provides a provision for a security seal.

PRODUCT SPECIFICATIONS

Specification	Details
Adapter interfaces	SC/APC, SC/UPC, LC/APC or LC/UPC
Port configurations	1, 2, 4, 6 or 12 ports; up to 24 ports with LC adapters
Slack storage	Up to 50 ft (15.2 m); capacity depends on cable configuration
Splice methods	Fusion or mechanical splicing
Cable routing	Rear-entry grommets, corner retention and tie-down points
Configuration options	Cable-entry clamp; internal or external grounding options
Closure	3/8-inch hex bolt; security-seal provision

CONFIGURATION OPTIONS

Part number	Configuration
CX31-01-01-01-N	1-port SC/APC
CX31-01-01-02-N	2-port SC/APC
CX31-02-01-06-N	6-port SC/APC
CX31-04-01-12-N	12-port SC/APC

SELECT YOUR CONFIGURATION

Specify adapter type, port count, cable-entry grommets and grounding requirements. Additional adapter and grommet configurations are selected for the installation.

Practical product support. Personal service.

sales@componexx.com | componexx.com

CX-31 Series